


## WRAP-N-WEIGH®

All ARPACSTRETCH™ platform stretch wrapper models are available in the WRAP-N-WEIGH® configuration. This alternative feature combines wrapping and weighing into one operation by integrating a precision scale and digital controls with either high or low profile turntables. Combining the two functions into one brings greater economy and efficiency to any wrapping operation requiring weighing. All low profile models are designed to be loaded using a pallet truck. Contact your distributor for more details on the WRAP-N-WEIGH® that's best for you.

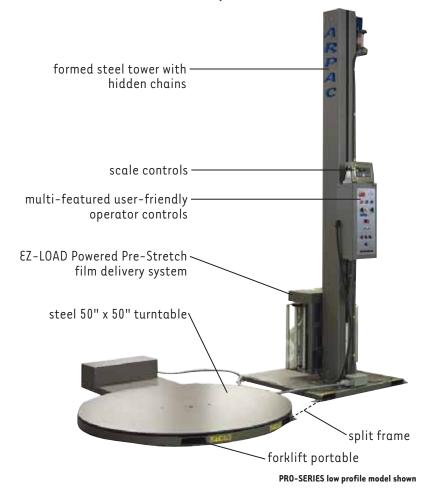



PRO-SERIES® High Profile (HP) WRAP-N-WEIGH®



Variety of Access Ramps

## **FEATURES**

- Equipped with 4 load cells
- 4 adjustable leveling pedestals
- Precision digital indicator with full numeric keyboard
- Optional remote displays available
- All-metal digital indicator enclosure
- Easy-to-read LED display
- NTEP certifiable
- RS-232 interface connection
- Network addressable



9511 West River Street
Schiller Park, IL 60176, USA
P 847 678 9034
F 847 671 7006
www.arpac.com









**EZ-DUZ-IT HP WNW** 

**EZ-DUZ-IT Plus HP WNW** 

SIDEWINDER 4 LP WNW

SIDEWINDER 6 HP WNW

	EZ-DUZ-IT		EZ-DUZ-IT <i>Plus</i>		PRO-SERIES		SIDEWINDER 4		SIDEWINDER 6	
	HP	LP	HP	LP	HP	LP	НР	LP	HP	LP
Load Height	72"	81"	72"	81"	72"	81"	72"	81"	72"	81"
Max. Load Diagonal Clearance	85"	85"	85"	85"	85"	85"	85"	85"	85"	97"

Note: A split frame design will lose up to 3" in wrap height with a standard 8' umbilical cord between the tower & the base when turntable is placed at maximum distance from the tower.

## **OPTIONS**

- Extended film tower for wrapping taller loads exceeding standard machine capability
- TOP PLATEN device used to stabilize tall or light unstable loads during rotation
- A variety of access ramps to assist loading of pallet
- Cold packs and freezer packs for cold temperatures
- AFTD (Automatic Film Tear Device)
  - automatically tears the film at the end of the cycle
- Pneumatic roping device for extra support of load (air required)
- · Adjustable manual roping guide
- NEMA 12 enclosure for dusty environments
- Split frame construction to increase film tower clearance for oversized loads
- Cycle counter to count the actual cycles of a machine operation
- Extended umbilical cords
- More options available, consult your local ARPAC*STRETCH™* representative

For complete product line, visit: www.arpac.com

